




GOLDSTRIKE PLUG AND PLAY INSTALLATION KIT

Parts Included:

1	Left side plug and play wiring harness	4	Cable ties
1	Right side plug and play wiring harness		

Installation Instructions:

1. Open the saddlebags and remove the two side panels below the seat. Unplug the heated seat harness (Fig. A). Using a 6mm allen wrench, remove the seat screws on each side (Fig. B). Pull straight up on the front of the seat then slide the seat forward to release the rear of the seat.

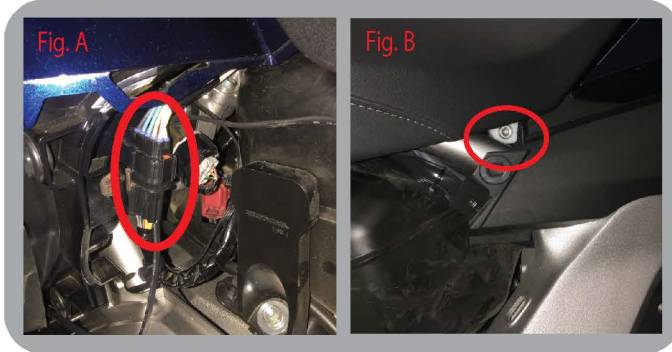

2. Locate the left and right rear lighting connectors. (Fig. 1)



3. Un-plug both connectors by pressing the tab and pulling apart. (Fig. 1)

4. Determine left and right Goldstrike wiring harness plugs by checking the labels, then plug them in-line with the factory wiring connectors you disconnected in step 2. The large connectors should be placed out of the way so the seat will not crush them. (Circled in red fig. 2)

5. Route the auxiliary plugs coming from the Goldstrike wiring harness under the frame rails towards the front of the motorcycle so the plugs end up near the gas tank. This will leave enough room to plug in your accessories without crushing the connectors when the seat is re-installed. (Fig. 2)

6. Plug in and test any Goldstrike accessories.

7. Re-install seat making sure that wires and connectors are not being crushed.

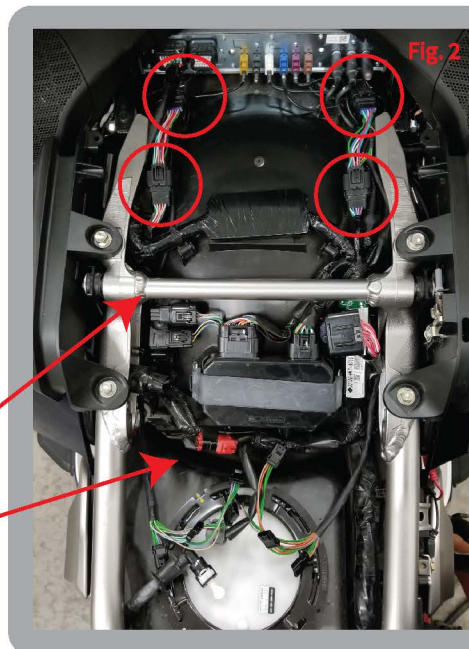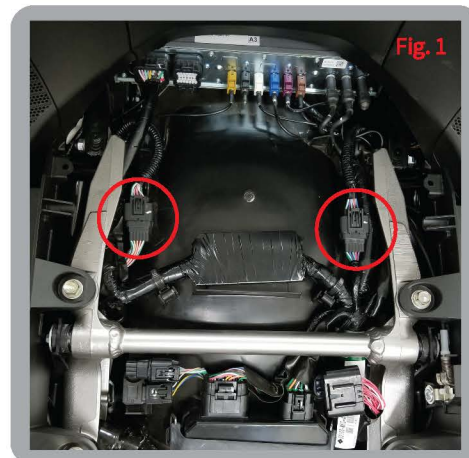

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Ciro products are designed and manufactured under very strict quality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure.

Ciro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products.

Please visit our website Ciro3d.com for our complete warranty policy.