

WE ARE TRANSFORMING MOBILITY THANKS TO A BLEND OF TECHNOLOGY AND ART, A COMBINATION OF NEW IDEAS AND UNIQUE DESIGN. WE ARE SHOWING THE WHOLE WORLD THAT FUNCTIONALITY CAN BE FUN AND THAT PRACTICALITY CAN ALSO BE A THING OF BEAUTY. AS YOU FLICK THE IGNITION SWITCH, WE WANT IT TO SET

OFF A REACTION, TRANSFORMING EVERY EXPERIENCE, WHETHER IT BE MONDAY MORNING, THE SCHOOL RUN, HOURS SPENT IN TRAFFIC OR A FRANTIC CALL TO PICK UP BREAD, INTO SOMETHING EXCITING. LET'S ENJOY EVEN THE MOST MUNDANE OF ROUTES AND MAKE OUR JOURNEY THE HIGHLIGHT OF THE DAY.





MP3 BUSINESS

500 ie ABS/ASR - 300 ie ABS/ASR



- ABS/ASR SYSTEM AND COMBINED BRAKING
- ELECTRONIC RIDE-BY-WIRE THROTTLE AND DUAL STD/ECO MAP (500 CC ONLY)
- STORAGE COMPARTMENT WITH USB SOCKET
- UNDERSEAT COMPARTMENT WITH ASSISTED OPENING AND CAPACITY FOR TWO FULL FACE HELMETS
- STAND-LESS PARKING SYSTEM USING THE ELECTRONIC SUSPENSION LOCK (ROLL LOCK)
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)
- PIAGGIO MP3 BUSINESS CAN BE RIDDEN, WITHIN THE LEGAL LIMITS, WITH A STANDARD CAR DRIVER'S LICENCE





MP3 SPORT

500 ie ABS/ASR - 300 ie ABS/ASR







- ABS/ASR SYSTEM AND COMBINED BRAKING.
 PIAGGIO MP3 SPORT IS ALSO AVAILABLE WITH COMBINED BRAKING ONLY
- ELECTRONIC RIDE-BY-WIRE THROTTLE AND DUAL STD/ECO MAP (500 CC ONLY)
- STORAGE COMPARTMENT WITH USB SOCKET
- UNDERSEAT COMPARTMENT WITH ASSISTED OPENING AND CAPACITY FOR TWO FULL FACE HELMETS
- STAND-LESS PARKING SYSTEM USING THE ELECTRONIC SUSPENSION LOCK (ROLL LOCK)

- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)
- BOLD TRIMS, MATT GREY DIAMOND EDGE WHEEL RIMS AND EXCLUSIVE MATT COLOUR SCHEMES
- PIAGGIO MP3 SPORT CAN BE RIDDEN, WITHIN THE LEGAL LIMITS, WITH A STANDARD CAR DRIVER'S LICENCE
- MP3 SPECIAL EDITION IN MATT GREY WITH METALLIC RIDER FOOTPEGS, BLUE GRAPHICS AND CARBON LOOK TRIM








BEVERLY SPORT TOURING

350 ie ABS/ASR



brown saddle

black saddle



- ABS/ASR SYSTEM
- SPACIOUS UNDERSEAT STORAGE COMPARTMENT WITH CAPACITY FOR TWO JET HELMETS
- REFINED, SPORTY STYLE WITH SMOKED TOP FAIRING AS STANDARD
- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)


BEVERLY POLICE

350 ie ABS/ASR - 300 ie ABS/ASR



- ABS/ASR SYSTEM
- BLACK SADDLE WITH DOUBLE STITCHING IN BLUE
- GLOSSY BLACK TRIM, DIAMOND EDGE BLACK WHEEL RIMS (300 CC ONLY)
- REAR VIEW MIRRORS WITH BLUE TINTED GLASS

- EXCLUSIVE MATT COLOUR SCHEME
- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)

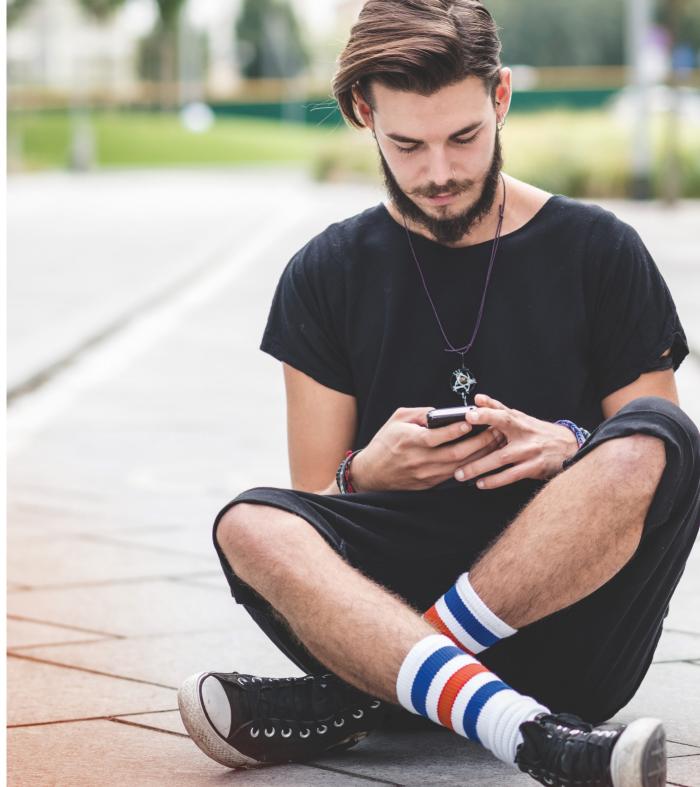



MEDLEY/MEDLEY S

125 ie ABS






- ABS SYSTEM
- SPACIOUS UNDERSEAT STORAGE COMPARTMENT WITH CAPACITY FOR TWO FULL FACE HELMETS
- DISTINCTIVE STYLE AND PAINSTAKING ATTENTION TO DETAILS
- USB SOCKET IN THE STORAGE COMPARTMENT

- LIQUID-COOLED I-GET ENGINES WITH START&STOP SYSTEM
- ELECTRONIC DASHBOARD WITH TRIP COMPUTER
- MEDLEY SPECIAL EDITION IN MATT GREY WITH BLUE GRAPHICS AND CARBON LOOK TRIM

LIBERTY/LIBERTY S

125 ie ABS - 50 ie 4T





- DASHBOARD WITH LCD DISPLAY
- ABS SYSTEM ON 125 CC AND 150 CC
- AIR-COOLED I-GET ENGINES EQUIPPED, FOR ALL ENGINE CAPACITIES, WITH ELECTRONIC INJECTION AND 3 VALVES
- LOW SADDLE UNDERSEAT COMPARTMENT WHICH CAN HOLD A JET HELMET WITH VISOR
- FRONT COMPARTMENT FOR STORAGE OF SMALL ITEMS
- LOWER SEAT TO SUIT ALL RIDERS AND FOLD-AWAY PASSENGER FOOTPEGS.











	MP3 Business		
	500 ie	300 ie	
Engine	Single cylinder, 4-stroke, 4 valves	Single cylinder, 4-stroke, 4 valves	
Engine capacity	493 cc	278 cc	
Bore x Stroke	94 mm x 71 mm	75 mm x 63 mm	
Power	28.5 kW -38,.8 HP- at 7,250 rpm	15.5 kW -21.1 HP- at 7,250 rpm	
Torque	45.5 Nm at 5,000 rpm	22.5 Nm at 6,000 rpm	
Consumption	22.7 km/l (WMTC cycle)	27.8 km/l (WMTC cycle)	
CO ₂ Emissions	102 g/km	84 g/km	
Fuel system	Electronic injection	Electronic injection	
Cooling	Liquid	Liquid	
Lubrication	Wet sump	Wet sump	
Starter	Electric	Electric	
Transmission	CVT continuously variable transmission with torque server	CVT continuously variable transmission with torque server	
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	
Frame	Double cradle in high resistance tubular steel	Double cradle in high resistance tubular steel	
Front suspension	Articulated quadrilateral	Articulated quadrilateral	
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload	
Front brake	Two 258 mm discs with hydraulic control	Two 258 mm discs with hydraulic control	
Rear brake	Ø 240 mm disc with hydraulic control	Ø 240 mm disc with hydraulic control	
Braking system	Combined braking with ABS/ASR	Combined braking with ABS/ASR	
Front tyre	Tubeless 110/70 - 13"	Tubeless 110/70 - 13"	
Rear tyre	Tubeless 140/70 - 14"	Tubeless 140/60 - 14"	
Length/ Width/Wheelbase	2,225 mm / 800 mm / 1,540 mm	2,225 mm / 800 mm / 1,500 mm	
Seat height	790 mm	790 mm	
Fuel tank capacity	12 litres	12 litres	
Emissions compliance	EURO 4	EURO 4	

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	_	
	MP3 Sport	
	500 ie	300 ie
Engine	Single cylinder, 4-stroke, 4 valves	Single cylinder, 4-stroke, 4 valves
Engine capacity	493 cc	278 cc
Bore x Stroke	94 mm x 71 mm	75 mm x 63 mm
Power	28.5 kW -38.8 HP- at 7,250 rpm	15.5 kW -21.1 HP- at 7,250 rpm
Torque	45.5 Nm at 5,000 rpm	22.5 Nm at 6,000 rpm
Consumption	22.7 km/l (WMTC cycle)	27.8 km/l (WMTC cycle)
CO ₂ Emissions	102 g/km	84 g/km
Fuel system	Electronic injection	Electronic injection
Cooling	Liquid	Liquid
Lubrication	Wet sump	Wet sump
Starter	Electric	Electric
Transmission	CVT continuously variable transmission with torque server	CVT continuously variable transmission with torque server
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Double cradle in high resistance tubular steel	Double cradle in high resistance tubular steel
Front suspension	Articulated quadrilateral	Articulated quadrilateral
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload
Front brake	Two 258 mm discs with hydraulic control	Two 258 mm discs with hydraulic control
Rear brake	Two 258 mm discs with hydraulic control	Two 240 mm discs with hydraulic control
Braking system	Combined braking with ABS/ASR**	Combined braking with ABS/ASR**
Front tyre	Tubeless 110/70 - 13"	Tubeless 110/70 - 13"
Rear tyre	Tubeless 140/70 - 14"	Tubeless 140/60 - 14"
Length/ Width/Wheelbase	2,225 mm / 800 mm / 1.540 mm	2,225 mm / 800 mm / 1.500 mm
Seat height	790 mm	790 mm
Fuel tank capacity	12 litres	12 litres
Emissions compliance	EURO 4	EURO 4

^{**} The Sport version is also available with combined braking only.

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	BEVERLY ST / BEVERLY Police	
	350 ie	
Engine	Single cylinder, 4-stroke, 4 valves	
Engine capacity	330 cc	
Bore x Stroke	78 mm x 69 mm	
Power	22.2 kW -30.2 HP- at 8,250 rpm	
Torque	29 Nm at 6,250 rpm	
Consumption	Electronic injection	
CO ₂ Emissions	27.8 Km/l (WMTC cycle)	
Fuel system	85 g/Km	
Cooling	Liquid	
Lubrication	Wet sump	
Starter	Electric	
Transmission	CVT continuously variable transmission	
Clutch	Automatic centrifugal multiplate wet clutch	
Frame	Double cradle in high resistance tubular steel	
Front suspension	Hydraulic telescopic fork	
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	
Front brake	Ø 300 mm disc with hydraulic control	
Rear brake	Ø 240 mm disc with hydraulic control	
Braking system	ABS/ASR	
Front tyre	Tubeless 110/70 - 16"	
Rear tyre	Tubeless 150/70 - 14"	
Length/ Width/Wheelbase	2,190 mm / 780 mm / 1,560 mm	
Seat height	790 mm	
Fuel tank capacity	12.5 litres	
Emissions compliance	EURO 4	

	MEDLEY / MEDLEY S	
	125 i-get ABS	
Engine	Single cylinder 4-stroke Piaggio i-get with "Start & Stop" system	
Engine capacity	125 cc	
Bore x Stroke	52 mm x 58.7 mm	
Max Power	9 kW at 8,250 rpm	
Max Torque	11.5 Nm at 6,500 rpm	
Consumption	46.3 km/l (WMTC cycle)	
CO ₂ Emissions	53 g/km	
Distribution	Single overhead camshaft (SOHC) - 4 valves	
Cooling	Liquid	
Lubrication	Wet sump	
Starter	Start & Stop system	
Fuel system	Electronic injection	
Transmission	Automatic CVT	
Clutch	Automatic centrifugal dry clutch	
Frame	Single-column steel structure with pressed steel reinforcement	
Front suspension	Telescopic hydraulic fork, 88 mm stroke	
Rear suspension	Hydraulic dual action shock absorber, 5-position spring preload adjustment, 76 mm stroke	
Braking system	Two-channel ABS	
Front tyre	Tubeless 100 / 80 – 16"	
Rear tyre	Tubeless 110 / 80 - 14"	
Front brake	Ø 260 mm disc, with 2 x Ø 25.4 mm dual piston floating caliper	
Rear brake	\emptyset 240 mm disc, with 2 x \emptyset 22 mm dual piston floating caliper	
ABS	As standard	
Length/ Width/Wheelbase	2,020 mm/705 mm/1,390 mm	
Seat height	799 mm	

7 litres (including 1.5 litre reserve)

EURO 4

Fuel tank

capacity

Emissions compliance

	LIBERTY / LIBERTY S		
		125 i-get ABS	50 i-get
Engine		Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Engine capacity		124 cc	49.9 cc
Bore x Stroke		52 mm x 58.6 mm	39 mm x 41.8 mm
Max Power		8 kW at 7,500 rpm	2.4 kW at 7,500 rpm
Max Torque		11 Nm at 6,000 rpm	3.1 Nm at 7,250 rpm
Consumption		40 Km/l (WMTC cycle)	35.71 km/l (WMTC cycle)
CO ₂ Emissions		61 g/Km	62 g/km
Distribution		Single overhead camshaft, 3 valves (2 intake, 1 output)	Single overhead camshaft, 3 valves (2 intake, 1 output)
Cooling		Air	Air
Lubrication		Oil with wet sump	Oil with wet sump
Fuel system		Electronic injection	Electronic injection
Starter		Electric	Electric
Transmission		Automatic CVT	Automatic CVT
Clutch		Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame		High resistance tubular steel	High resistance tubular steel
Front suspension		Telescopic hydraulic fork, 76 mm stroke	Telescopic hydraulic fork, 76 mm stroke
Rear suspension		Single hydraulic shock absorber with 5-position preload adjustment, 74.5 mm stroke	Single hydraulic shock absorber, 73.5 mm stroke
Front tyre		Tubeless 90 / 80 - 16", 51J	Tubeless 90 / 80 - 16", 51J
Rear tyre	_	Tubeless 100 / 80 - 14", 54J	Tubeless 100 / 80 - 14", 54J
Front brake		Disco singolo Ø 240 mm	Disco singolo Ø 240 mm
Rear brake	_	Tamburo Ø 140 mm	Tamburo Ø 140 mm
ABS		As standard	-
Length/ Width/Wheelbase	_	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,370 mm
Seat height		< 790 mm	780 mm
Fuel tank capacity		6 I (including 1.5 I reserve)	6 I (including 1.5 I reserve)

EURO 4

Emissions compliance

EURO 4



MP3

- Large top box kit with interface plate (can hold two full-face helmets)
- Medium top box kit with interface plate (can hold one full-face and one jet helmet)
- Quick-release thermoformed bags
- Leg cover predisposed for heating
- Heated hand grips
- Hand warmers
- Outdoor vehicle cover
- Electronic alarm
- Multimedia and GPS bracket kit
- PMP Piaggio Multimedia Platform
- Smartphone Bracket
- Comfort saddle
- Racing footpegs kit
- Modular helmet with visor and sun visor
- Full Jet helmet with sun visor

BEVERLY

- Windscreen
- Transparent or smoked top fairing
- 37 I top box
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Indoor vehicle cover
- Electronic alarm
- Saddle-handlebar anti-theft system
- Multimedia and GPS bracket
- PJ helmet with visor and sun visor
- PJ1 helmet with sun visor

LIBERTY

- Windscreen
- Transparent or smoked top fairing
- Top box (can hold one full-face helmet or two P-Style Jet helmets)
- Top box backrest to match the saddle
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- PMP Piaggio Multimedia Platform
- Bike finder
- Piaggio Sound System
- USB socket kit
- Side stand
- Rubber mat
- P-Style helmet colour matched to the scooter

MEDLEY

- "Style" and "urban" windscreen
- Transparent or smoked top fairing
- Large top box kit (can hold two full-face helmets)
- Medium top box (can hold a fullface helmet or two P-Style Jet helmets)
- Top box backrest to match the saddle
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- Multimedia and GPS bracket kit
- PMP Piaggio Multimedia Platform
- Piaggio Sound System
- Side stand
- Rubber mat
- P-Style helmet colour code to match the vehicle

FOR ALL VEHICLES

TomTom VIO GPS navigation system Piaggio Group special edition





PIAGGIO.NO

IMPORTØR I NORGE:



The company reserves the right to make technical and aesthetic changes at any time. Ride carefully, always wearing a helmet and suitable gear. Always comply with the rules of the road and respect the environment. Read the operating and maintenance manual carefully. Always ask for original and approved spare parts in accordance with prevailing standards. See your Official Piaggio Dealership and Authorised Retailers for a secure purchase and guaranteed service support. Original Piaggio spare parts are a guarantee of quality and ensure that vehicle performance remains unaltered.

=ISO 9001=

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV

CERTIFIED BY DNV

CERTIFIED BY DNV

CERTIFIED BY DNV

CERTIFIED BY DNV =ISO 14001=

=OHSAS 18001=

Piaggio is a registered trademark of Piaggio & C. S.p.A.

DEALERSHIP STAMP



IMPORTØR I NORGE:



PIAGGIO.NO